




STANDARD REINFORCING MESH CHART

	STYLE DESIGNATION		
	NEW DESIGNATION	OLD DESIGNATION (BY STEEL WIRE GAUGE)	APPROX. WEIGHT/100 FT. ²
SHEETS	6 x 6 - (D/W)1.4 x (D/W)1.4	6 x 6 - 10 x 10	21 lb.
	6 x 6 - (D/W)2.1 x (D/W)2.1	6 x 6 - 8 x 8	30 lb.
	6 x 6 - (D/W)2.9 x (D/W)2.9	6 x 6 - 6 x 6	42 lb.
	6 x 6 - (D/W)4.0 x (D/W)4.0	6 x 6 - 4 x 4	58 lb.
	4 X 4 - (D/W)2.9 x (D/W)2.9	4 x 4 - 6 x 6	62 lb.
	4 X 4 - (D/W)4.0 x (D/W)4.0	4 x 4 - 4 x 4	85 lb.
ROLLS	6 x 6 - (D/W)1.4 x (D/W)1.4	6 x 6 - 10 x 10	21 lb.
	6 x 6 - (D/W)2.9 x (D/W)2.9	6 x 6 - 6 x 6	42 lb.

“D” - denotes deformed wire; conforms to ASTM A497 “W” - denotes smooth wire; conforms to ASTM A185
 Wire for concrete reinforcement conforms to ASTM A1064

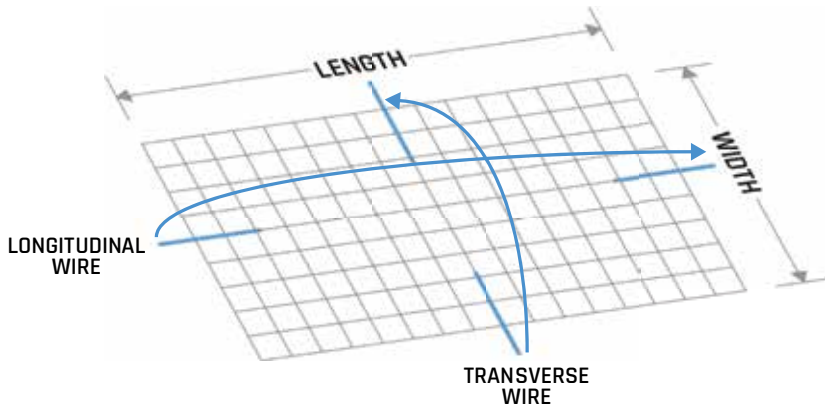

Industry Method for Designating Style:

Example: **6 x 6 - (D/W)2.1 x (D/W)2.1**

Longitudinal wire spacing
 Transverse wire spacing
 Transverse wire size
 Longitudinal wire size

